


150+20/-0mm

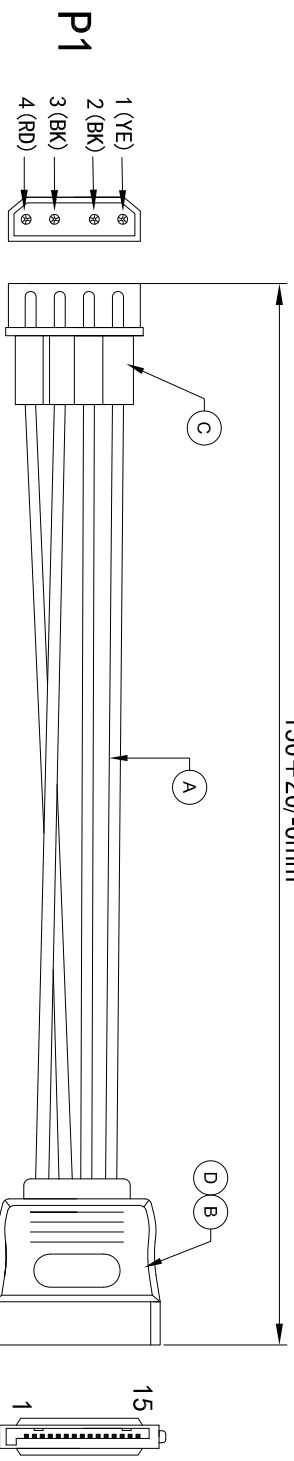

WIRE ADDRESS

P1		P2
1	YELLOW	13+14+15
2	BLACK	10+11+12
3	BLACK	4+5+6
4	RED	7+8+9
X		1+2+3

Electrical Test:
 1.100% TEST OPEN SHORT MIS-WIRE.
 2.CONTACT RESISTANCE:3Ω MAX.
 3.INSULATION RESISTANCE:5MΩ MIN.
 4.HI-POT:300V DC/10MS.

NUMBER	1	2	4	Quantity	Unit
D	45P BLACK PVC			7.2	G
C	BIG 4P MALE(Transparent White)			1	PCS
B	SERIAL ATA 15P FEMALE (Black Insulator)			1	PCS
A	UL1007 18# WIRE YELLOW*1/BLACK*2/RED*1,PVC JACKET.(BC)				PCS
F	PRODUCT SPECIFICATIONS				

Power Adapter Cable, 4-pin HDD to SATA			
Item	11.03.1055		
Draw	<i>Yakko</i>	Date:	2020.08.12
Approval			
Duty	F16	BOM.NO:	

Sample NO.	Drawings of 1 (1)	Proportion: 1:1	Unit(mm)	A4
------------	-------------------	-----------------	----------	----

