



Datenblatt - Fiche technique - Data sheet

11.03.1555




ROLINE Internes Festplattenkabel SATA 3.0 Gbit/s, 0,5m

ROLINE Câble SATA 3.0 Gbit/s pour disques durs I/II, 0,5 m


ROLINE Internal SATA 3.0 Gbit/s Cable, 0.5 m

ROHS-COMPPLIANT

LTR	REV.	DESCRIPTION	DATE
△*2	B	ECR # 081203-5 EDIT PACKING, ADD BARCODE LABEL	12/03/08'

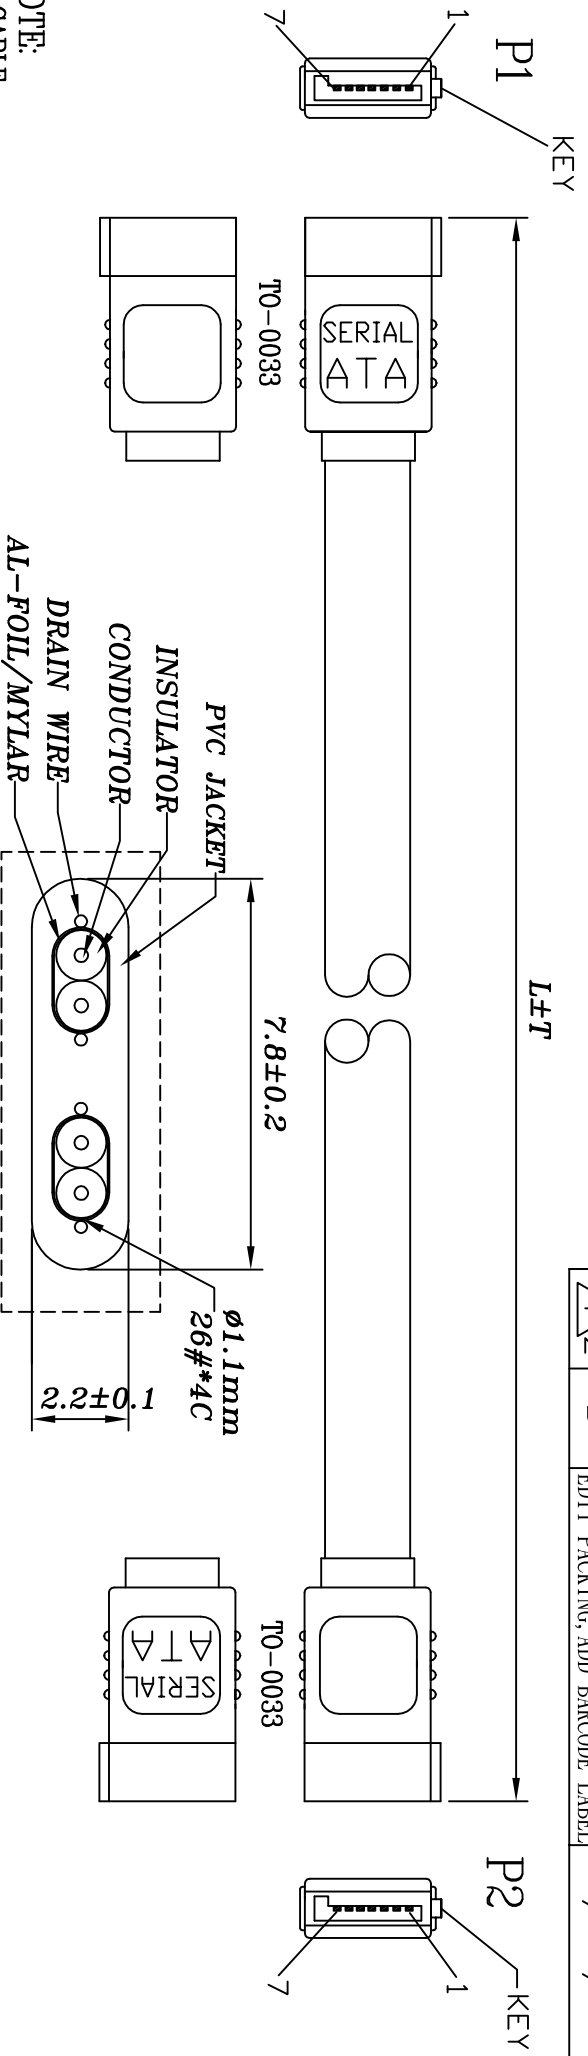

- NOTE:**
- CABLE:**
UL2725 80°C 30V [26AWG(1/0.404)*2F +AL/MY+DRAIN WIRE(1/0.32)*2]TIN
INS: FOAM-PE OD: $\phi 1.1 \pm 0.05 \text{mm}$
PVC JACKET OD: $\phi(2.2 \pm 0.1) * (7.8 \pm 0.2) \text{mm}$ COLOR: RED (PANTONE 200C)
IMPEDANCE: $100 \pm 5 \text{ OHM}$
 - CONNECTOR:**
2-1 MATERIAL:
HOUSING: HIGH TEMPERATURE POLYESTER & GLASS FIBER UL 94V-0
TERMINAL: COPPER ALLOY, CRIMP TYPE
 - 2-1 PLATING:**
CONTACT AREA: G/F
 - HOOD:** MOLDED TYPE, PVC 45P, COLOR: BLACK(NK-K01)
 - CABLE ASS'Y ELECTRICAL TEST:**
4-1 100% OPEN SHORT & MIS WIRE TEST
4-2 CONTACT RESISTANCE 3 OHM MAX
4-3 INSULATION RESISTANCE 10M OHM MIN
4-4 HI-POT DC300V/0.01SEC.
 - PACKING:** EACH PC / POLYBAG + HEADER CARD + BAR CODE LABEL.
100 PCS / INNER CARTON, 2 INNER CARTON / MASTER CARTON

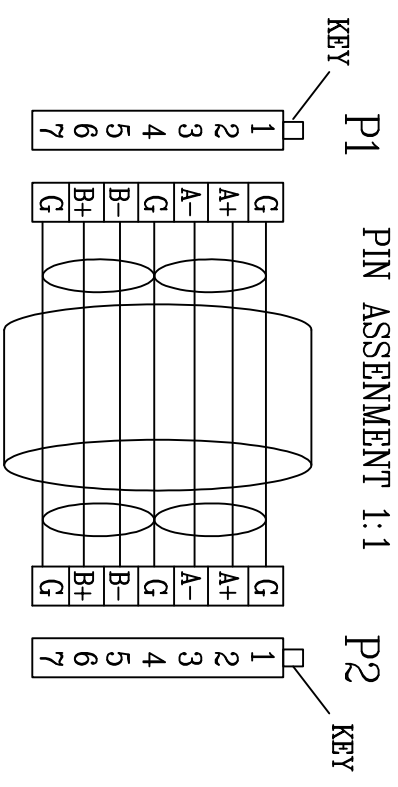

- 1**



140-1483-2	11.03.1560	1000	20	360*310*150	380*330*340	7611990148790
140-1483-1	11.03.1555	500	20	360*310*100	380*330*240	
DWG	P/N	L (mm)	T (mm)	INNER CTN(mm)	MASTER CTN(mm)	BAR CODE NO.

Tolerance Inch M/M	
.X	.015 .30
.XX	.010 .10
.XXX	.005 .05
Draw	FANNIE 12/03/08'
Check	
App'd	Customer T-RAG
Scale	NONE Units m/m Third Angle Projection
Dwg No.	140-1483 REV:B Sheet 1/1

Rotronic Co., Ltd.

SERIAL ATA SIGNAL CABLE

Customer P/N