



Datenblatt - Fiche technique - Data sheet


**11.09.4503**




ROLINE 3,5mm Verbindungskabel ST / ST, 3m

ROLINE Câble 3,5mm M / M, 3m

ROLINE 3.5mm Cable, M-M, 3 m

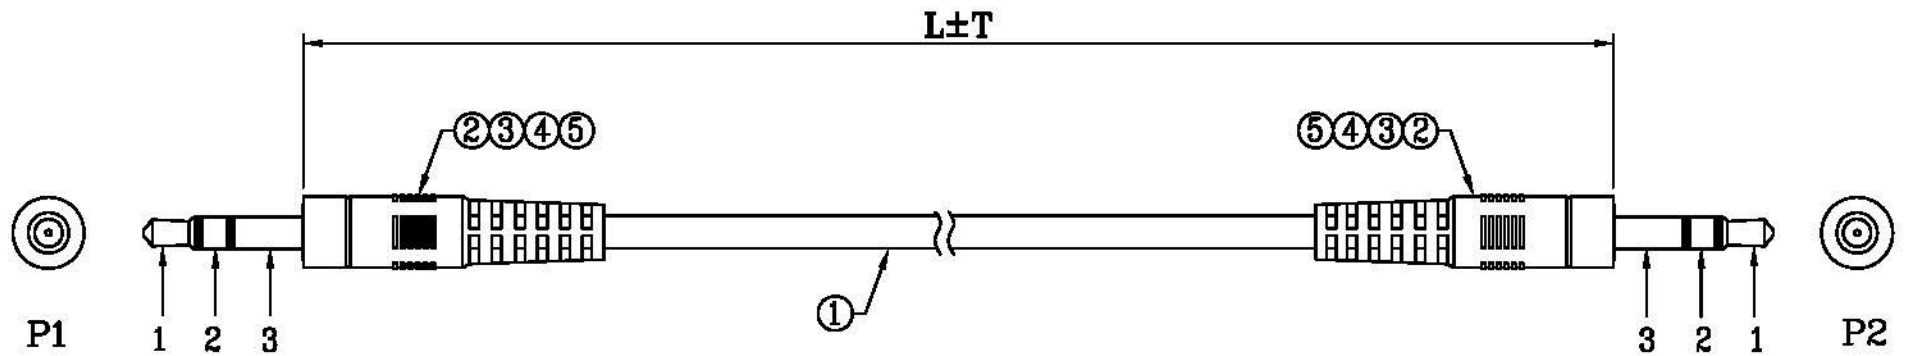

Item no.	L (M)	T (MM)	Contact Resistance
11.09.4500	0.2M	10MM	1 OHM (MAX.)
11.09.4501	1.0M	20MM	2 OHM (MAX.)
11.09.4502	2.0M	30MM	2 OHM (MAX.)
11.09.4503	3.0M	40MM	2 OHM (MAX.)
11.09.4505	5.0M	50MM	2 OHM (MAX.)
11.09.4510	10.0M	100MM	3 OHM (MAX.)

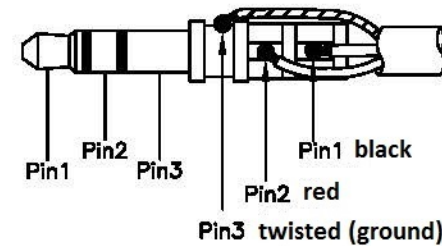

### Pin Assignment

P1	P2
1 — BLACK	1
2 — RED	2
3 — GROUND	3

### Electrical Test:

- 100% Test (Open, short, miss wire)
- Contact Resistance: \* ohm (Max)
- Insulation Resistance: 10M ohm (Min)
- Hi-Pot: 300V DC/10ms

NO	DESCRIPTION	Q'TY	UNIT	TOLERANCE	TOLERANCE		rotronic
					INCHES	M/M	
5	Transparent PE	4	g	.X	.015	.30	11.09.4500 / 11.09.4501 / 11.09.4502 11.09.4503 / 11.09.4505 / 11.09.4510
4	BLACK Ø1.0*10mm THIN.	0.02	m	.XX	.010	.10	
3	PVC 45P BLACK	12	g	.XXX	.005	.05	
2	DC PLUG Ø3.5MM NICKEL PLATED, BLACK INSULATION	2	pcs	DRAWN BY	LIU WEI		ROLINE 3.5mm Stereo Cable, M/M, black color
1	NO UL 28AWG*2C+S OD:2.8MM BLACK PVC	L	m	CHECK BY			SCALE NONE
				APPD BY			DRAWING NO.:
							UNIT MM
							DATE 2014.11.12
							REV. 1/1