
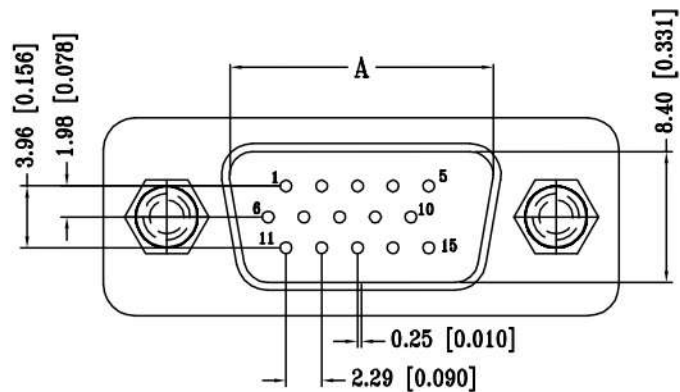
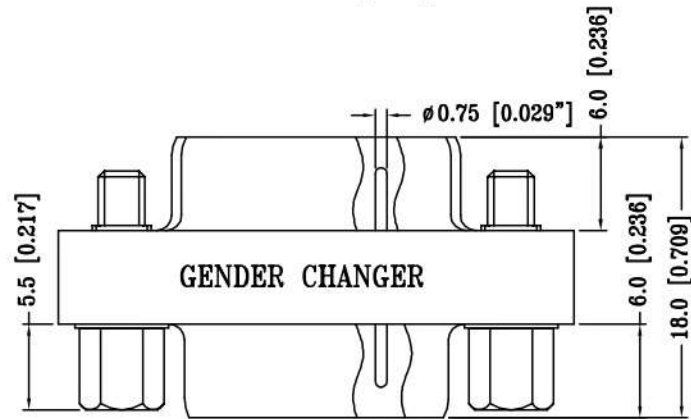


REV.	ECN NO. / DESCRIPTION	DATE

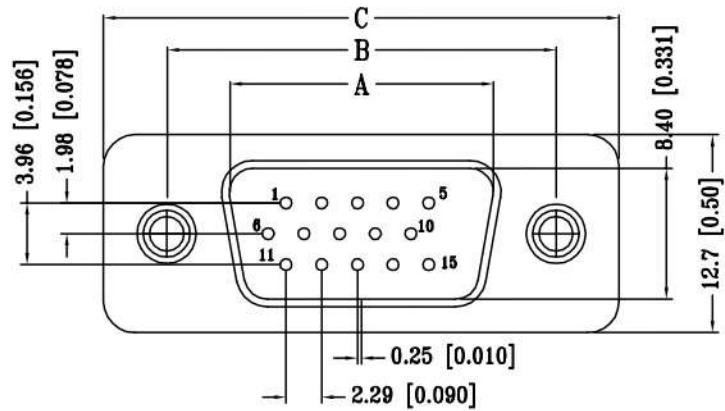

MATERIAL

INSULATOR: BLUE PBT UL94 V-0 RATED
 CONTACTS: BRASS
 SHELL: STEEL

FINISH

CONTACTS: GOLD FLASH OVER NICKEL
 SHELL: NICKEL PLATED

ELECTRICAL CHARACTERISTICS

CONTACT RESISTANCE: 25mΩ MAX
 CURRENT RATING: 5 AMPERES
 INSULATION RESISTANCE: 5000MΩ MIN
 DIELECTRIC WITHSTANDING VOLTAGE: 1000VAC 60SEC

Circuits	A	B	C
15	16.9(.665")	25.0(.984")	31.2(1.22")

GENERAL TOLERANCES UNLESS SPECIFIED		PART NO. 12.03.2016	SECOMP		
X ±0.30	X° ±3°	APPROVE Ted Ju 07/02 '04			
XX ±0.15	X° ±1.5°	CHECK Ted Ju 07/02 '04	DWG NO. LAP-A9215CB2L		
XXX ±	XX° ±	CUSTOMER DRAWING	DRAW C.C.S 07/02 '04		
SIZE A4	UNITS MM [INCH]	DRAWING SYMBOL	SHEET 1 / 1	SCALE 1:1	REV 1