


ROLINE Cable USB4 Gen3x2, with Emark, C-C, M/M, 100W, black, 0.8 m

| | |
|---------------------------|---------------|
| Product No. | 11.02.9092 |
| Manufacturer | ROLINE |
| Manufacturer No. | 11.02.9092 |
| EAN (single piece) | 7630049627840 |

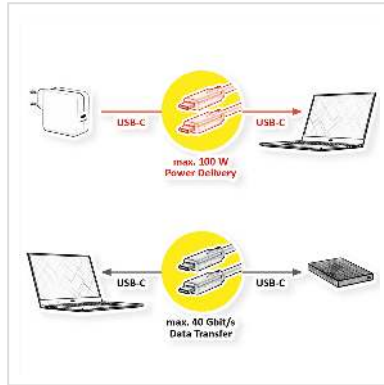

High quality USB 4 Gen 2x2 cable with the reversible USB-C connector on both ends for data transfer rates of up to 20 Gbit/s and USB Power Delivery up to 20V / 5A.

- High quality USB4 Gen 3x2 cable with improved shielding
- With the reversible Type C connectors at both ends
- Gold-plated contacts for low wear at high plugging cycles
- Suitable for data transfer rates of up to 40 Gbit/s
- Supports USB Power Delivery to 20V / 5A

The major benefits of the USB4 includes faster transfer speeds (up to 40 Gbit/s), a better management of video bandwidth (using a process called "protocol tunneling" that sends DisplayPort, PCIe and USB packets at the same time while allocating bandwidth accordingly) and optional compatibility with Thunderbolt 3 products.

Technical specifications

| | |
|---------------|------------|
| Manufacturer | ROLINE |
| Product group | Cable |
| Product type | USB4 Cable |
| Colour | black |
| Length | 0.8 m |

| | |
|------------------------------------|---|
| Transfer quality | USB4 Gen3x2 40 Gbit/s |
| Connection ports | USB Type C (USB-C) Male / USB Type C (USB-C) Male |
| Side 1 Connector Type | USB Type C (USB-C) |
| Side 1 Connector Gender | Male |
| Side 2 Connector Type | USB Type C (USB-C) |
| Side 2 Connector Gender | Male |
| Maximum data transfer rate | 40 Gbit/s |
| Area of application | External |
| Supported charging technology | USB-PD - USB Power Delivery |
| Power (max.) | 100 W |
| Cable shielding | Screened |
| Hand locking screws | no |
| Weight | 56 g |
| Height of packaging (single piece) | 10 mm |
| Width of packaging (single piece) | 130 mm |
| Depth of packaging (single piece) | 100 mm |
| Package weight (single piece) | 0.037 kg |