


ROLINE KVM Extender over Fiber Optic, HDMI 4K, USB, 20 km

| | |
|---------------------------|---------------|
| Product No. | 14.01.3363 |
| Manufacturer | ROLINE |
| Manufacturer No. | 14.01.3363 |
| EAN (single piece) | 7630049631977 |

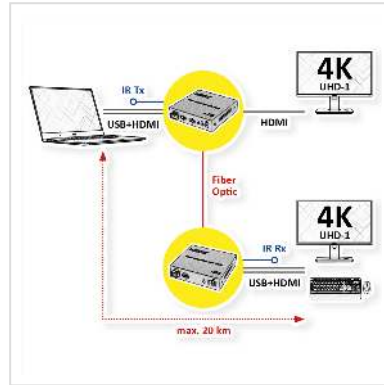

The KVM extension transmits HD audio and video signals as well as USB signals up to 20 km via a bidirectional fiber optic single-fiber cable. This allows a computer system to be controlled up to 20 km away via the remote console (HDMI 4K monitor, USB keyboard and USB mouse).

- Areas of application: Security control, multimedia teaching, HDMI signal extension
- Max. Resolution: 3840x2160 @60Hz
- Use of bidirectional fiber optic simplex cables for low costs with stable signal transmission
- Supports audio connection 3.5 mm (L-PCM), IR and RS232
- Solid metal housing
- SFP modules (Single Mode Fiber) included (transmitter/receiver)
- An additional HDMI monitor can be connected to the transmitter

Technical specifications

| | |
|---------------|---------------------|
| Manufacturer | ROLINE |
| Product group | KVM (IP) extensions |
| Product type | KVM-Extender, HDMI |
| Colour | silver |
| Length | 20 km |

| | |
|---|--|
| Scope of delivery | Transmitter, receiver, 2x SFP module, 2x power supply unit (12 V, 2 A), IR transmitter/receiver pair, operating instructions |
| Interface | HDMI |
| Inputs | 1 |
| Outputs | 1 |
| Max. distance | 20 km |
| Supported PC-Systems | USB |
| PC: monitor connection | HDMI |
| PC: mouse/keyboard connection | 2x USB |
| PC: connection on moulded cables | no |
| Analogue Console: Mouse/Keyboard connection | USB |
| Integrated console | no |
| Switching over Scan Run | yes |
| Print button on device | yes |
| Switching over OSD | no |
| Integrated Hub | no |
| Keyboard/mouse emulation | yes |
| 19" compatible | no |
| Cascadable | no |
| Hot plug compatible | yes |
| Max. resolution (nominal) | 3840 x 2160 @60Hz |
| Colour (Design profile) | silver |
| Material (casing) | Metal |
| Power supply unit required | yes |

| | |
|-------------------------------|------|
| Operating temperature min. | 0 °C |
|-------------------------------|------|

| | |
|-------------------------------|-------|
| Operating temperature max. | 40 °C |
|-------------------------------|-------|

| | |
|--------|-------|
| Height | 17 mm |
|--------|-------|

| | |
|-------|--------|
| Width | 106 mm |
|-------|--------|

| | |
|-------|--------|
| Depth | 106 mm |
|-------|--------|

| | |
|--------|-------|
| Weight | 273 g |
|--------|-------|

| | |
|---------------------------------------|-------|
| Height of packaging (single piece) | 80 mm |
|---------------------------------------|-------|

| | |
|--------------------------------------|--------|
| Width of packaging (single piece) | 140 mm |
|--------------------------------------|--------|

| | |
|--------------------------------------|--------|
| Depth of packaging (single piece) | 250 mm |
|--------------------------------------|--------|

| | |
|----------------------------------|------|
| Package weight (single piece) | 1 kg |
|----------------------------------|------|