


# ROLINE ProSecure III 2000 - Online UPS

|                           |               |
|---------------------------|---------------|
| <b>Product No.</b>        | 19.40.1064    |
| <b>Manufacturer</b>       | ROLINE        |
| <b>Manufacturer No.</b>   | 19.40.1064    |
| <b>EAN (single piece)</b> | 7611990130412 |

**roline**  
Designed for Professionals

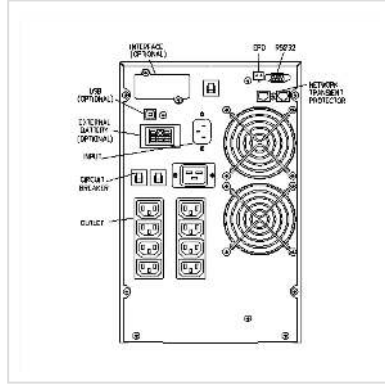

**The ROLINE ProSecure Series - for optimum power protection is a truly state of the art online double conversion UPS, ideal for all essential computer systems and servers. Protects against: power failure, power sag, power surge, under voltage, over voltage, switch transient, line noise, frequency variation, harmonic distortion.**

Product features:

- Cold start function (DC power on)
- Lightning and surge protection
- Battery replacement warning
- Emergency Power Off function
- Battery remain time display
- LCD display front panel
- Power factor correction
- Support USB communication
- Multiple language LCD display
- On line output voltage selected
- Hot swappable battery by user
- True on-line technology provides all power protection
- Pure sine-wave output with less than 3% THD
- Fully digitized microprocessor controlled
- Short Circuit and overload protection
- Advanced battery management (ABM)
- Automatic battery charge in UPS off mode
- Automatic diagnostics & battery check

- RS-232 communication port with monitoring software
- Network/fax/modem surge protection
- Extended back up time with battery pack
- Load segmentation receptacles controllable
- High efficiency mode selectable
- Fan speed auto control when loads varies
- UPS Management Software : Windows NT/ 2k / XP / 7 / 8 /Server 2003 / 2008 / 2012 x86/x64, MAC OS X (Intel) 10.6.x, 10.7.x, 10.8.x Mountain Lion, 10.9.x MavericksMAC OS, LINUX
- Contents: UPS, cable set, UPS management software

### Technical specifications

|                              |                            |
|------------------------------|----------------------------|
| Manufacturer                 | ROLINE                     |
| Product group                | UPS                        |
| Product type                 | UPS Online                 |
| Colour                       | black                      |
| Scope of delivery            | UPS, Software, Cable Set   |
| Classification (IEC 62040-3) | VFI-SS-111                 |
| UPS technology               | Online                     |
| Power class                  | 2000 ... 3000 VA           |
| Output (VA/W)                | 2000 /1800                 |
| Efficiency                   | 95 %                       |
| Backup time                  | 3 min                      |
| Backup time full/half-load   | 3.5 / 11 min               |
| Dimensions (HxWxD)           | 358 x 225 x 420 mm         |
| Mounting form                | Tower                      |
| Voltage (input)              | 160-230V                   |
| Voltage (output)             | 230V                       |
| Output voltage regulation    | ± 2%                       |
| Frequency                    | 50Hz ± 3%                  |
| Connector type (input)       | cold connector IEC 320 C14 |

|  |                               |
|--|-------------------------------|
| Outputs                                | 9                             |
| Connector type (output)                | 4x cold connector IEC 320 C13 |
| Phase in/output                        | 230V/230V / 50Hz              |
| Over current protection                | EMI,- RFI-Filter              |
| Max. quantity of delay expansion units | 2                             |
| Delay expansion unit                   | 2                             |
| Slots for adapter card                 | 1                             |
| Slot for adapter card                  | 1                             |
| Interface                              | RS232, USB                    |
| RS-232 Interface                       | Yes                           |
| USB 2.0 Interface                      | Yes                           |
| Hot swap batteries                     | Yes, front side               |
| Bypass                                 | Automatic + manual            |
| Additional over current protector      | No                            |
| Activity                               | Display                       |
| Activity LED                           | 5                             |
| Activity Display                       | LCD                           |
| incl.Management Software               | Windows                       |
| Internal cooling                       | Active, fan                   |
| Ambient temperature                    | 0-40C                         |
| Operating temperature min.             | 0 °C                          |
| Operating temperature max.             | 40 °C                         |
| Height                                 | 358 mm                        |
| Width                                  | 225 mm                        |
| Depth                                  | 420 mm                        |
| Weight                                 | 31 kg                         |

|                                       |        |
|---------------------------------------|--------|
| Height of packaging<br>(single piece) | 500 mm |
|---------------------------------------|--------|

|                                      |        |
|--------------------------------------|--------|
| Width of packaging<br>(single piece) | 340 mm |
|--------------------------------------|--------|

|                                      |        |
|--------------------------------------|--------|
| Depth of packaging<br>(single piece) | 530 mm |
|--------------------------------------|--------|

|                                  |       |
|----------------------------------|-------|
| Package weight (single<br>piece) | 30 kg |
|----------------------------------|-------|

### **Back up time**

Power rating (VA / W)

with 0 / 1 / 2 Battery pack (minutes),  
according to manufacturer