


# ROLINE Outdoor S/FTP Patch Cord Cat.6A / Class EA, Stranded, TPE, LSOH, black, 10 m

|                           |               |
|---------------------------|---------------|
| <b>Product No.</b>        | 21.15.0759    |
| <b>Manufacturer</b>       | ROLINE        |
| <b>Manufacturer No.</b>   | 21.15.0759    |
| <b>EAN (single piece)</b> | 7630049627512 |

**roline**  
Designed for Professionals

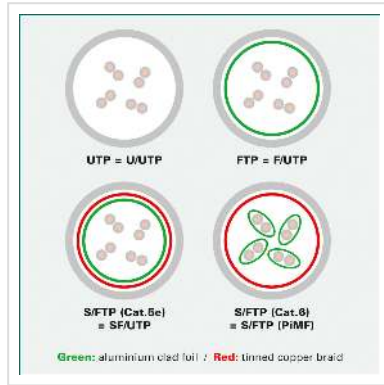

**Cat.6A**  
Class EA

**S/FTP**

**LSOH**

**Assembled double shielded (PiMF) twisted pair cable category 6A with shielded RJ-45 connectors on both sides. For outdoor use (cable routing), e.g. for connecting an IP camera.**

Patch cord for networking connections between devices in combination with outdoor application (e.g. connection to outdoor surveillance cameras)

- Prepared double shielded Twisted Pair cable with screened RJ-45 connectors on both ends
- Durable due to moulded kink protection
- Suitable for PoE applications and multimedia applications where the extension is working over TP
- High quality plugs with gold plated contacts
- UV - resistant (Ultraviolet resistance - ability of the material to withstand the degradation that can be caused by exposure to ultraviolet light)
- Contact settings 1:1, in accordance with the EIA/TIA 568 standard
- Construction: 4-pair stranded copper wire, complete braid shielding, pairs shielded with aluminium foil

REMARK: NOT suitable for underground installation / application

## Technical specifications

|                                       |                    |
|---------------------------------------|--------------------|
| Manufacturer                          | ROLINE             |
| Product group                         | Twisted Pair Cable |
| Product type                          | S/FTP Patchcord    |
| Colour                                | black              |
| Length                                | 10 m               |
| Shield type                           | PiMF               |
| Transfer quality                      | Cat6A / Class EA   |
| Quantity of wires                     | 8                  |
| Conductor cross section<br>(AWG)      | AWG 26             |
| Conductor type                        | Wire               |
| Crossed                               | no                 |
| Bend radius                           | Min. 25mm          |
| External cable diameter               | 6.0 +/-0.2mm       |
| Cable LSOH                            | yes                |
| Material (external cable<br>mantle)   | TPE                |
| Side 1 Connector Type                 | RJ-45              |
| Side 1 Connector<br>Gender            | Male               |
| Side 2 Connector Type                 | RJ-45              |
| Side 2 Connector<br>Gender            | Male               |
| Connector Type RJ45                   | Standard           |
| Operating temperature<br>min.         | -40 °C             |
| Operating temperature<br>max.         | 75 °C              |
| Weight                                | 293 g              |
| Height of packaging<br>(single piece) | 34 mm              |

---

|                                      |        |
|--------------------------------------|--------|
| Width of packaging<br>(single piece) | 100 mm |
|--------------------------------------|--------|

|                                      |        |
|--------------------------------------|--------|
| Depth of packaging<br>(single piece) | 100 mm |
|--------------------------------------|--------|

|                                  |         |
|----------------------------------|---------|
| Package weight (single<br>piece) | 12.5 kg |
|----------------------------------|---------|